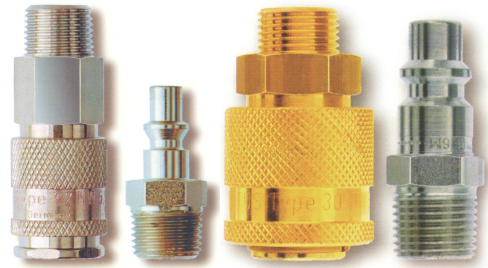


Air Quick Connect Couplings

High Quality RECTUS Couplers

INTERCHANGEABLE!

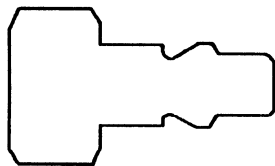


RECTUS couplers are interchangeable with:

- ✓ Aeroquip
- ✓ Amflo
- ✓ ARO
- ✓ CEJN
- ✓ Coilhose
- ✓ Dynaquip
- ✓ Foster
- ✓ Hansen
- ✓ Hofmann
- ✓ Lincoln
- ✓ Milton
- ✓ Parker
- ✓ Perfecting
- ✓ Schrader Bellows
- ✓ Snap-Tite
- ✓ Tomco
- ✓ Weatherhead


Select the correct coupling by checking your existing part with the templates below:

Nipple Design Interchange




SERIES 22
ARO 210 Interchange

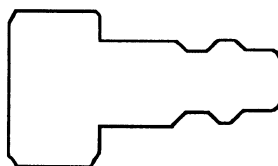See pages 226-227



SERIES 23 & 24
1/4" Industrial Interchange

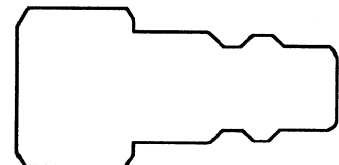See pages 228-230



SERIES 30
3/8" Industrial Interchange

See pages 231-232

Male Pipe Thread Profiles

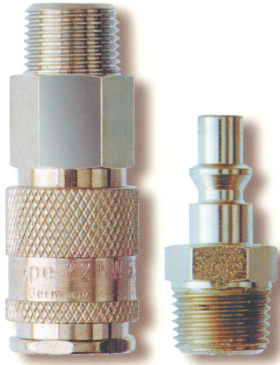


Sub-Miniature, Miniature, 1/2" Industrial Interchange, Safety Lock and Double Shut-off Couplers available on request.


Air Quick Connect Couplings - Series 22

Push Type

ARO 210 Interchange



PLUGTEMPLATE:



DESCRIPTION:

An "innovative valve" coupling with the ability to interchange with the ARO 210 increases user flexibility. In addition, it allows the coupling to retrofit easily into existing air supply systems. The coupling's superior capacity and low pressure drop substantially increases productivity, tool efficiency and energy savings. Automatic one hand operation.

STANDARD DESIGN:







Coupler Body: Brass
 Sleeve: Steel Hardened, Yellow Zinc-plated
 Valve: Brass
 Springs, Balls: Stainless Steel
 Locking Ring: AISI 301
 Seals: Buna-N
 Plugs: Steel Hardened, Zinc-plated

TEMPERATURE RANGE:


-40°F to +250°F

MAXIMUM RATED PRESSURE:

1000 psi

		Single shut-off	PART NO.	CONNECTION	PRICE EACH
COUPLERS	 Female Pipe Thread		AC22F14	1/4 NPT	Call for Pricing 800-627-1033
			AC22F38	3/8 NPT	
	 Male Pipe Thread		AC22M14	1/4 NPT	
			AC22M38	3/8 NPT	
	 Standard Hose Barb		AC22HB14	1/4" Hose Barb	
			AC22HB38	3/8" Hose Barb	
PLUGS	 Female Pipe Thread		AP22F14	1/4 NPT	
			AP22F38	3/8 NPT	
	 Male Pipe Thread		AP22M14	1/4 NPT	
			AP22M38	3/8 NPT	
	 Standard Hose Barb		AP22HB14	1/4" Hose Barb	
			AP22HB38	3/8" Hose Barb	

RELATED PRODUCTS



Air Hose



Hose Clamps



Air Guns



Thread Seal Tape

ARO 210 Interchangeability Chart - Series 22

SFP	RECTUS	CEJN		AMFLO	ARO	FOSTER	HANSEN	WEATHERHEAD
Automatic	Automatic	Automatic		Manual	Automatic	Automatic	Manual	Automatic
Series 22	Series 22	Series 300	Series 301	Series 30	Series 210	Series 210	Series 100	Series 24
COUPLERS								
Female Pipe Thread								
AC22F14	K2-222D	10-300-1402	10-301-1402	C38	210	210-3003	102	24-147-04
AC22F38	K2-222F	10-300-1404	10-301-1404	C38-23	210-203	210-3203	104	24-147-06
Male Pipe Thread								
AC22M14	K2-223D	10-300-1452	10-301-1452	C37	210-212	210-3103	103	24-146-04
AC22M38	K2-223F	10-300-1454	10-301-1454	C37-03	210-213	210-3303	105	24-146-06
Standard Hose Barb								
AC22HB14	K2-22106	10-300-1002	10-301-1002	C38-42	--	210-3603	110	24-148-04
AC22HB38	K2-22110	10-300-1004	10-301-1004	C38-44	--	210-3703	112	24-148-06
PLUGS								
Female Pipe Thread								
AP22F14	N3-222D-S	10-300-5402		CP38	2609	210-11	1G2	24-247-04
AP22F38	N3-222F-S	10-300-5404		CP38-23	22237	--	1G4	24-247-06
Male Pipe Thread								
AP22M14	N3-223D-S	10-300-5452		CP37	2608	210-10	1G3	24-246-04
AP22M38	N3-223F-S	10-300-5454		CP37-03	22236	--	1G5	24-246-06
Standard Hose Barb								
AP22HB14	N3-22106-S	10-300-5002		CP37-42	3946	210-16	1G10	24-248-04
AP22HB38	N3-22110-S	10-300-5004		--	22238	210-17	1G12	24-248-06

Self-Coiling Hose

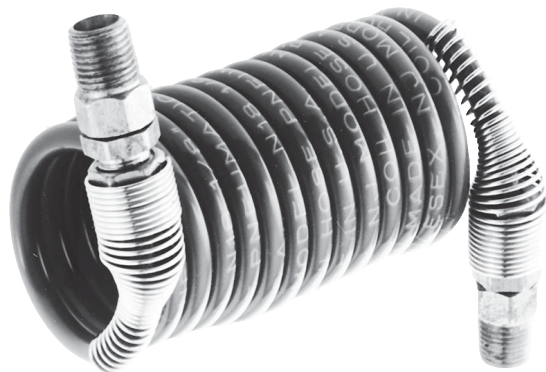
A Safe, Convenient Hose for all Pneumatic Tools

FEATURES:

- Stretches and Recoils Like a Telephone Cord
- Lightweight
- Abrasion Resistant - Nylon 11
- Completely Oil Proof
- Male Swivel Fittings with Spring Guard Included On All Assemblies
- 200 psi at +70°F

COLOR: Yellow

TEMPERATURE RANGE: -40°F to +180°F



**Standard Duty, Self-Coiling,
Air Hose Assemblies**

PART NO.	LENGTH	NPT	PRICE EACH
SCH-06/12	12'	1/4	Call for Pricing
SCH-06/25	25'	1/4	
SCH-06/50	50'	1/4	
SCH-10/12	12'	3/8	
SCH-10/25	25'	3/8	
SCH-10/50	50'	3/8	


Air Quick Connect Couplings - Series 23

Push Type

1/4" Industrial Interchange



PLUG TEMPLATE:



DESCRIPTION:

An "innovative valve" coupling with the ability to interchange with the 1/4" industrial standard, thus increasing user flexibility. In addition, it allows the coupling to retrofit easily into existing air supply systems. The coupling's superior capacity and low pressure drop substantially increases productivity, tool efficiency and energy savings. Automatic one hand operation.

STANDARD DESIGN:








Coupler Body: Brass
 Sleeve: Steel Hardened, Yellow Zinc-plated
 Valve: Brass
 Springs, Pins: Stainless Steel
 Locking Rings: AISI 301
 Seals: Buna-N
 Plugs: Steel Hardened, Zinc-plated

TEMPERATURE RANGE:


-40°F to +250°F

MAXIMUM RATED PRESSURE:

1000 psi

	 Single shut-off	PART NO.	CONNECTION	PRICE EACH
COUPLERS	 Female Pipe Thread	AC23F14	1/4 NPT	Call for Pricing 800-627-1033
		AC23F38	3/8 NPT	
	 Male Pipe Thread	AC23M14	1/4 NPT	
		AC23M38	3/8 NPT	
	 Standard Hose Barb	AC23HB14	1/4" Hose Barb	
		AC23HB38	3/8" Hose Barb	
		AC23HB14PL	1/4" Push Lock	
		AC23HB38PL	3/8" Push Lock	
PLUGS	 Female Pipe Thread	AP23F14	1/4 NPT	
		AP23F38	3/8 NPT	
	 Male Pipe Thread	AP23M18	1/8 NPT	
		AP23M14	1/4 NPT	
		AP23M38	3/8 NPT	
	 Standard Hose Barb	AP23HB14	1/4" Hose Barb	
		AP23HB38	3/8" Hose Barb	
		AP23HB14PL	1/4" Push Lock	
	AP23HB38PL	3/8" Push Lock		

RELATED PRODUCTS



Air Hose
Pages 267-270



Hose Clamps
Pages 272-274



Air Guns
Page 224



Thread Seal Tape
Page 263


Air Quick Connect Couplings - Series 24

Push Type

1/4" Industrial Interchange



PLUG TEMPLATE:



DESCRIPTION:

An economy coupler with the ability to interchange with 1/4" industrial standard increases user flexibility. Its high air capacity and low pressure drop are superior to that of many comparable couplings - thus providing significant increases in productivity, efficiency and energy savings. Automatic one hand operation.

STANDARD DESIGN:








Coupler Body: Brass
 Sleeve: Brass
 Valve: Brass
 Springs, Pins: Stainless Steel
 Locking Rings: AISI 301
 Seals: Buna-N

TEMPERATURE RANGE:

-40°F to +250°F


MAXIMUM RATED PRESSURE:

1000 psi

	 Single shut-off	PART NO.	CONNECTION	PRICE EACH
COUPLERS	 Female Pipe Thread	AC24F14	1/4 NPT	Call for Pricing 800-627-1033
		AC24F38	3/8 NPT	
	 Male Pipe Thread	AC24M14	1/4 NPT	
		AC24M38	3/8 NPT	
	 Standard Hose Barb	AC24HB14	1/4" Hose Barb	
		AC24HB38	3/8" Hose Barb	
		AC24HB14PL	1/4" Push Lock	
		AC24HB38PL	3/8" Push Lock	
PLUGS	 Female Pipe Thread	AP23F14	1/4 NPT	
		AP23F38	3/8 NPT	
	 Male Pipe Thread	AP23M18	1/8 NPT	
		AP23M14	1/4 NPT	
		AP23M38	3/8 NPT	
	 Standard Hose Barb	AP23HB14	1/4" Hose Barb	
		AP23HB38	3/8" Hose Barb	
		AP23HB14PL	1/4" Push Lock	
	AP23HB38PL	3/8" Push Lock		

Note: Plugs are the same for Series 23 and 24.

RELATED PRODUCTS



Air Hose
Pages 267-270



Hose Clamps
Pages 272-274



Air Guns
Page 224



Thread Seal Tape
Page 263


Air Quick Connect Couplings - Series 30

Push Type

3/8" Industrial Interchange



PLUG TEMPLATE:



DESCRIPTION:

Series 30 conforms to the 3/8" industrial interchange, allowing easy retrofit to existing air systems. It offers high capacity and low pressure drop. Automatic one hand operation.

STANDARD DESIGN:








Coupler Body: Steel Hardened
Yellow Zinc-plated
Sleeve: Brass
Valve: Brass
Springs, Pins: Stainless Steel
Locking Rings: AISI 301
Seals: Buna-N
Plugs: Steel Hardened
Zinc-plated

TEMPERATURE RANGE:


-40°F to +250°F

MAXIMUM RATED PRESSURE:

1000 psi

		 Single shut-off	PART NO.	CONNECTION	PRICE EACH		
COUPLERS	 Female Pipe Thread		AC30F14	1/4 NPT	Call for Pricing		
			AC30F38	3/8 NPT			
			AC30F12	1/2 NPT			
	 Male Pipe Thread		AC30M14	1/4 NPT			
			AC30M38	3/8 NPT			
			AC30M12	1/2 NPT			
	 Standard Hose Barb		AC30HB14	1/4" Hose Barb			
			AC30HB38	3/8" Hose Barb			
			AC30HB12	1/2" Hose Barb			
			AC30HB38PL	3/8" Push Lock			
	PLUGS	 Female Pipe Thread		AP30F14		1/4 NPT	800-627-1033
				AP30F38		3/8 NPT	
			AP30F12	1/2 NPT			
 Male Pipe Thread			AP30M14	1/4 NPT			
			AP30M38	3/8 NPT			
			AP30M12	1/2 NPT			
 Standard Hose Barb			AP30HB14	1/4" Hose Barb			
			AP30HB38	3/8" Hose Barb			
			AP30HB12	1/2" Hose Barb			
			AP30HB38PL	3/8" Push Lock			

RELATED PRODUCTS



Air Hose



Hose Clamps



Air Guns



Thread Seal Tape

1/4" Industrial Interchangeability Chart - Series 23 & 24

SFP		RECTUS		PARKER		ARO	CEJN	COILHOSE	WEATHERHEAD	FOSTER		HANSEN		HOFMANN		TOMCO	
AUTOMATIC		AUTOMATIC		AUTOMATIC	MANUAL	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	MANUAL	AUTOMATIC	MANUAL	AUTOMATIC	MANUAL	AUTOMATIC	
Series 23	Series 24	Series 23	Series 24	Series 23	Series 24	Series Hi Flo	Series 3100	Series 15	Series 24	Series FM3	Series 3	Series 3000	Series 4-RO	Series 1000	Series QA	Series A	Series 180
COUPLERS																	
Female Pipe Thread																	
AC23F14	AC24F14	K2-232D	K2-242D	B33	B23	23102-20	3100B3-4B	150	24-147-04	FM3003	3003	3000	4-ROS-25F	1000	FA2-Q	FA2	184
AC23F38	AC24F38	K2-232F	K2-242F	B33E	B23E	23102-003	3100B3-4D	151	24-147-06	FM3203	3203	3200	4-ROS-37F	1200	FA3-Q	FA3	185
Male Pipe Thread																	
AC23M14	AC24M14	K2-233D	K2-243D	B32	B22	23102-212	3100B4-4B	152	24-146-04	FM3103	3103	3100	4-ROS-25M	1100	MA2-Q	MA2	181
AC23M38	AC24M38	K2-233F	K2-243F	B32E	B22E	23102-213	3100B4-4D	155	24-146-06	FM3303	3303	3300	4-ROS-37M	1300	MA3-Q	MA3	182
Standard Hose Barb																	
AC23HB14	AC24HB14	K2-23106	K2-24106	B30-3B	B20-3B	23102-002	3100B2-B	153	24-148-04	FM3603	3603	3600	--	1600	SA2-Q	SA2	186
AC23HB38	AC24HB38	K2-23100	K2-24110	B30-5B	B20-5B	23102-024	3100B2-D	156	24-148-06	FM3703	3703	3700	--	1700	SA3-Q	SA3	187
AC23HB14-PL	AC24HB14-PL	K2-23906	K2-24906	B30-3BP	B20-3BP	23102-027	--	--	--	FM1513	1513	3600P	--	1600P	--	--	189
AC23HB38-PL	AC24HB38-PL	K2-23910	K2-24910	B30-5BP	B20-5BP	23102-028	--	--	--	FM1713	1713	3700P	--	1700P	--	--	--
PLUGS																	
Female Pipe Thread																	
AP23F14	AP24F14	N3-232DS	N3-222DS	H3C		23902-200	3113-4B	1502	24-247-04				11		FPA2		1805
AP23F38	AP24F38	N3-232FS	N3-222FS	H3C-E		23902-003	3113-4D	1505	24-247-06				15		FPA3		1806
Male Pipe Thread																	
AP23M18	AP24M18	N3-233BS	--	H0C		23902-110	3114-4A	1504	--				12		MPA1		1802
AP23M14	AP24M14	N3-233DS	N3-223DS	H2C		23902-210	3114-4B	1501	24-246-04				10		MPA2		1804
AP23M38	AP24M38	N3-233FS	N3-223FS	H2C-E		23902-310	3114-4D	1503	24-246-06				14		MPA3		1806
Standard Hose Barb																	
AP23HB14	AP24HB14	N3-23106S	N3-22106S	H8C		23902-220	3111-B	1506	24-248-04				16		SPA2		1824
AP23HB38	AP24HB38	N3-23110S	N3-22110S	H9C		23902-420	3111-D	1508	24-248-06				17		SPA3		1826
AP23HB14-PL	AP24HB14-PL	N3-23906M	--	H8CP		23902-027	--	--	--				51-3		16P		1850
AP23HB38-PL	AP24HB38-PL	N3-23910M	--	H9CP		23902-028	--	--	--				71-3		17P		--

3/8" Industrial Interchangeability Chart - Series 30

SFP	RECTUS	PARKER		HOFMANN	ARO	CEJN	COILHOSE	FOSTER		HANSEN		TOMCO		LINCOLN	AMFLO		
AUTOMATIC	AUTOMATIC	AUTOMATIC	MANUAL	MANUAL	AUTOMATIC	AUTOMATIC	AUTOMATIC	AUTOMATIC	MANUAL	AUTOMATIC	MANUAL	AUTOMATIC	MANUAL	AUTOMATIC	MANUAL		
Series 30	Series 30	Series 30	Series 20	Series B	Series Hi Flo	Series 4300	Series 58	Series FM4	Series 4	Series 4000	Series 400	Series T4000	Series T400	SERIES64	Series 3/8		
COUPLERS																	
Female Pipe Thread																	
AC30F14	K2-302D	B35C	25C	FB2		23103-002	--	582	FM4004	4004	4000	400	T4000	T400	642004	C26-22	
AC30F38	K2-302F	B35	25	FB3		23103-300	4300B3-4D	580	FM4204	4204	4200	420	T4200	T420	642006	C26	
AC30F12	K2-302G	B35F	25F	FB4		23103-004	4300B3-4F	584	FM4004	4404	4400	440	T4400	T440	642008	C26-24	
Male Pipe Thread																	
AC30M14	K2-303D	B34C	24C	MB2		23103-012	--	581	FM4104	4104	4100	410	T4100	T410	641001	C26-02	
AC30M38	K2-303F	B34	24	MB3		23103-313	4300B4-4D	583	FM4304	4304	4300	430	T4300	T430	641006	C25182	
AC30M12	K2-303G	B34F	24F	MB4		23103-014	4300B4-4F	--	FM4404	4404	4400	440	T4400	T440	642008	C26-24	
Standard Hose Barb																	
AC30HB14	K2-30106	--	--	SB2		23103-22	--	--	FM4604	4604	40400	4004	T4600	T460	--	C26-42186	
AC30HB38	K2-30110	B34-5B	24-5B	SB3		23103-324	4300B2-D	586	FM4804	4804	40600	4006	T4800	T480	647006	C26-44	
AC30HB112	K2-30113	--	24-6B	SB4		23103-325	4300B2-F	588	FM4904	4904	40800	4008	T4900	T490	647008	C26-45	
AC30HB14PL	K2-30906	B34-5BP	24-5BP	--		23103-027	--	--	FM1514	1514	--	--	--	--	--	C26-42L	
AC30HB38PL	K2-30910	--	--	--		23103-028	--	--	FM1714	1714	--	--	--	--	--	C26-44L	
PLUGS																	
Female Pipe Thread																	
AP30F14	N3-302DS		H1E	FPB2		23903-210	4304-4B	5803		41-4			41		T41	640204	C26-22
AP30F38	N3-302FS		H3E	FPB3		23903-300	4303-4D	5802		43-4			43		T43	640206	CP26
AP30F12	N3-302GS		H3E-F	FPB4		23903-004	4303-4F	--		45-4			45		T45	640208	CP26-24
Male Pipe Thread																	
AP30M14	N3-303DS		H0E	MPB2		23903-210	4304-4B	5803		40-4			40		T40	640104	CP25-02
AP30M38	N3-303FS		H2E	MPB3		23903-310	4304-4D	5801		42-4			42		T42	640106	CP25
AP30M12	N3-303GS		H2E-F	MPB4		23903-410	4304-4F	--		44-4			44		T44	640108	CP25-04
Standard Hose Barb																	
AP30HB14	N3-30106S	--	--	SPB2		23903-220	4301-B	--		46-4			404		T46	--	C26-42
AP30HB38	N3-30110S		H5E	SPB3		23903-420	4301-D	5806		48-4			406		T48	640706	CP26-44
AP30HB12	N3-30113S		H6P	SPB4		23903-520	4301-F	5808		49-4			408		T49	640708	CP26-45
AP30HB14PL	N3-30906M		H5EP	--		23909-027	--	--		51-4			--		--	--	CP26-42L
AP30HB38PL	N3-30910M		H6EP	--		23903-028	--	--		71-4			--		T492	--	CP26-44L

